

NP Series

NP12200 12V200AH



NP Series VRLA battery uses AGM technology and high-purity raw materials. Its good floating back up and large current discharge performance makes it optimal and economical choice



Benefits

- Long life according to EUROBAT Classification
- Maximum charge efficiency
- High gas recombination efficiency
- Low self-discharge rate
- Easy installation and handling
- Vertical or horizontal installation


Applications

- UPS units
- Emergency power
- Starting generators
- EPS units

Standards

- IEC 60896-21/22
- JIS C8704-1/2
- EUROBAT guide

Drawing

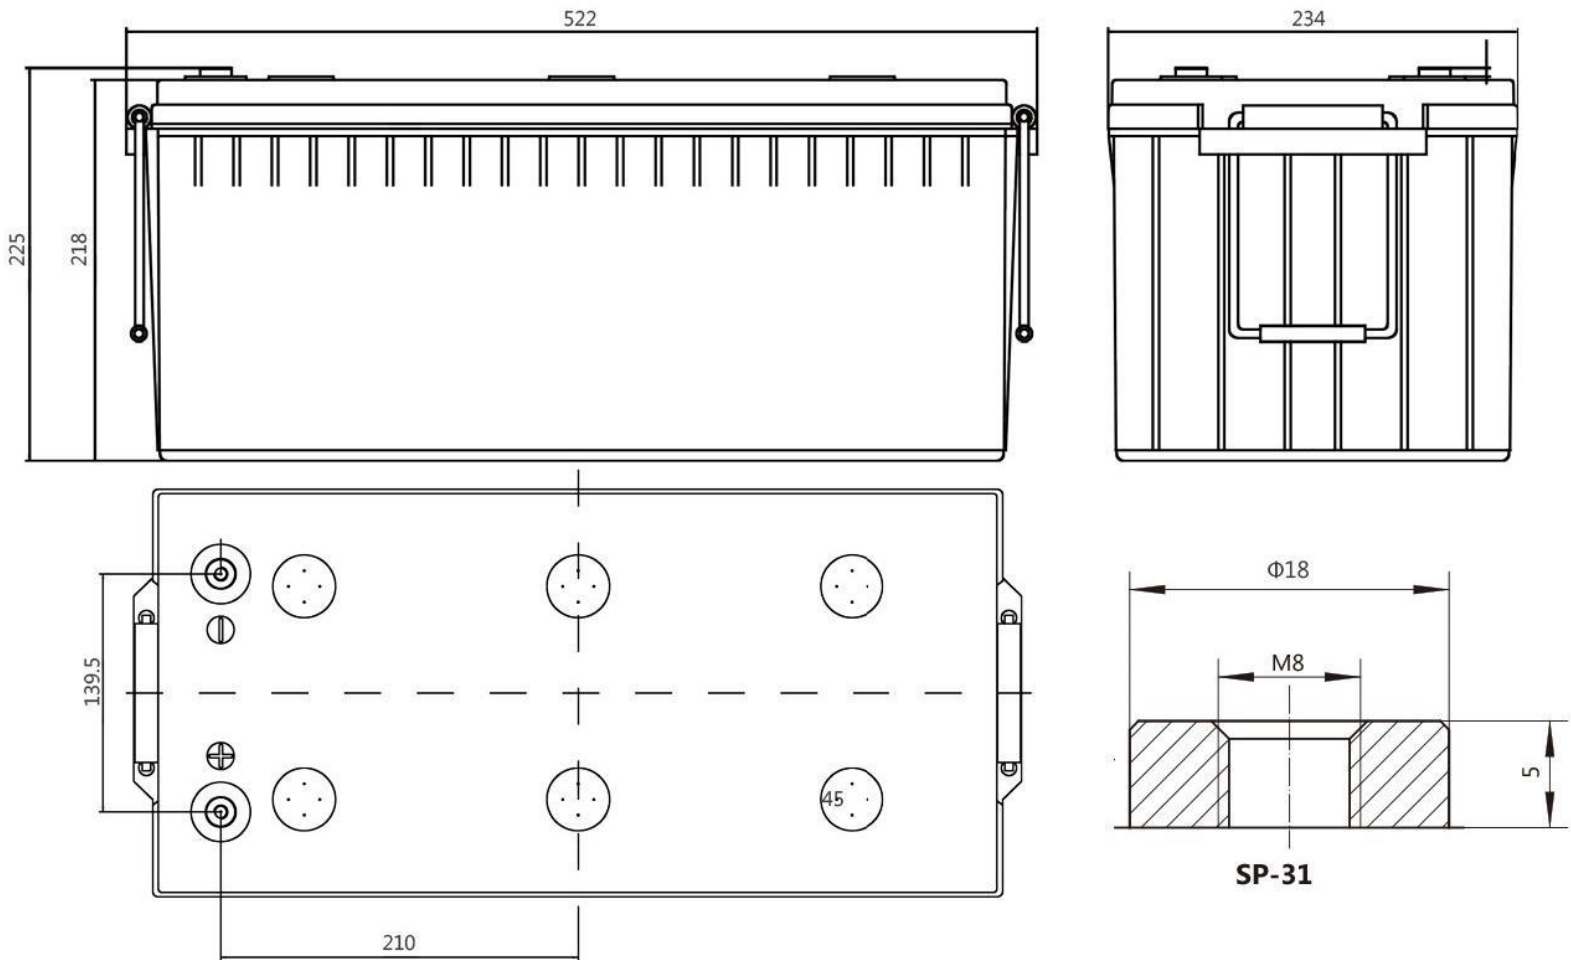

Specifications


Battery Model	NP12200			
Design Life (years, 25°C)	10			
Capacity (Ah, 25°C)	20HR (10.4A, 1.80V)	10HR (20.0A, 1.80V)	5HR (34.0A, 1.75V)	1HR(113A, 1.70V)
	208	200	170	113
Dimensions (mm)	Length	Width	Height	Total Height
	522	234	218	225
Approx. Weight (kg)	55.6			
Reference Internal Resistance (mΩ)	3.0 (full charged @ 25°C)			
Maximum Discharge Current (A/5 Sec.)	1800			
Self-Discharge (25°C)	≤2% per month			
Charge Voltage (V/cell, 25°C)	Cycle use		Float use	
	2.40 (-3.5mV/°C/cell), max charge current: 60 A		2.27 (-3.5mV/°C/cell)	
Short Circuit Current (A)	4000			

Discharge Data


Constant Current Discharge Data (25°C, A)												
End Voltage (V/cell)	min					h						
	10	15	20	30	45	1	1.5	2	3	5	10	20
1.60	409.0	312.0	244.0	189.0	145.0	117.0	88.4	69.30	53.20	35.30	20.50	10.80
1.65	386.0	302.0	235.0	184.0	142.0	115.0	87.0	68.30	52.50	34.80	20.40	10.70
1.67	379.8	295.6	231.0	180.9	140.3	114.2	86.2	67.94	52.15	34.67	20.34	10.70
1.70	372.0	288.0	226.0	177.0	138.0	113.0	85.1	67.30	51.70	34.40	20.30	10.70
1.75	339.0	270.0	218.0	169.0	133.0	110.0	82.8	66.50	51.00	34.00	20.20	10.60
1.80	312.0	253.0	205.0	163.0	129.0	105.0	80.5	64.20	50.00	33.20	20.00	10.40

Constant Power Discharge Data (25°C, W/Cell)												
End Voltage (V/cell)	min					h						
	10	15	20	30	45	1	1.5	2	3	5	10	20
1.60	710.0	580.0	458.0	355.0	262.0	214.0	164.0	131.00	101.00	66.20	40.00	21.10
1.65	682.0	565.0	451.0	349.0	256.0	211.0	162.0	130.00	100.00	65.80	39.70	21.00
1.67	667.3	557.6	444.9	345.7	254.5	209.4	161.8	129.76	99.85	65.68	39.64	20.96
1.70	650.0	548.0	437.0	341.0	252.0	207.0	161.0	129.00	99.50	65.30	39.50	20.90
1.75	614.0	521.0	420.0	329.0	246.0	204.0	160.0	128.00	98.70	64.70	39.30	20.80
1.80	571.0	491.0	399.0	312.0	238.0	198.0	157.0	126.00	96.60	64.00	39.00	20.60


Performance Curve

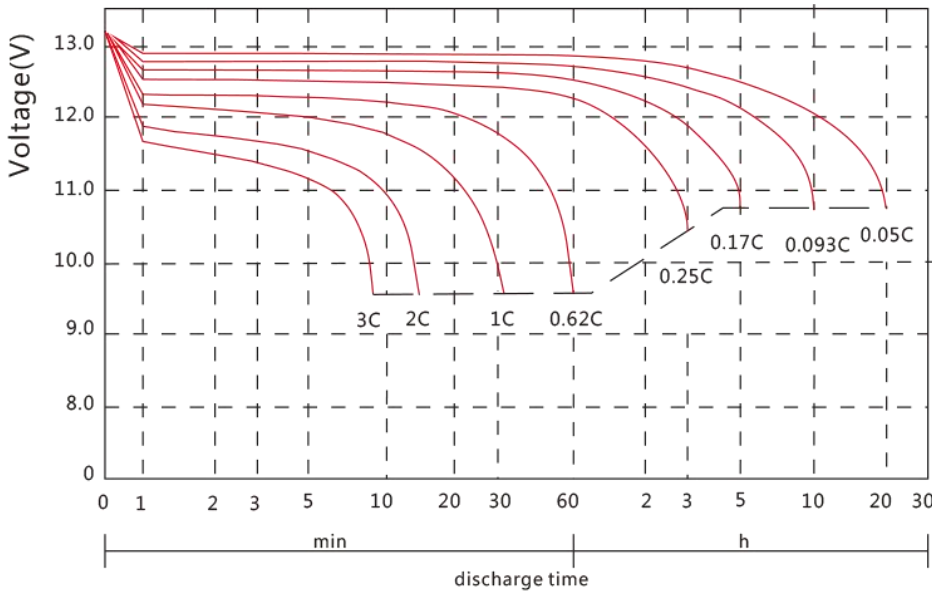


Discharge voltage vs. discharge time

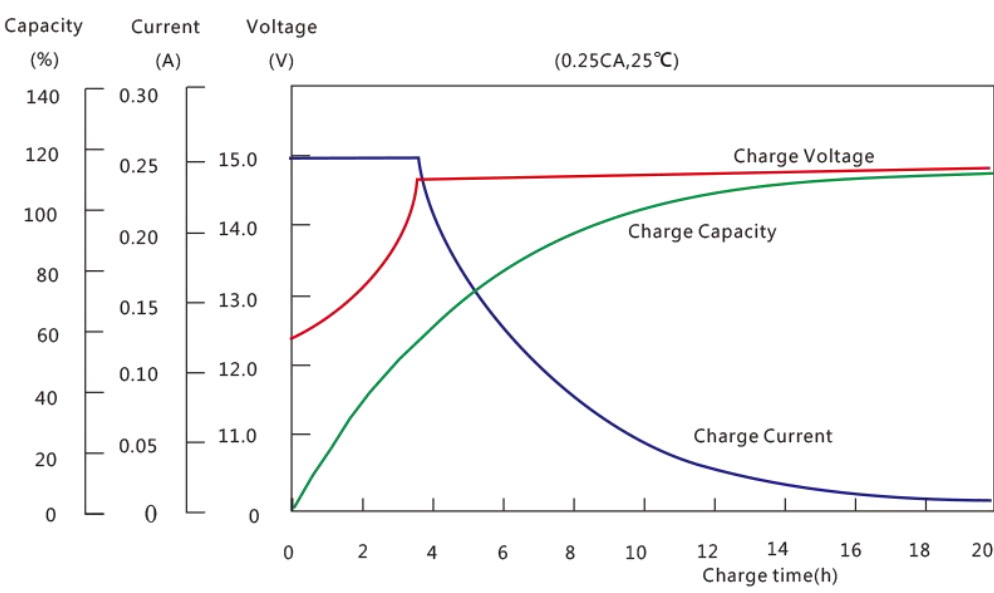

Charge capacity vs. charge time

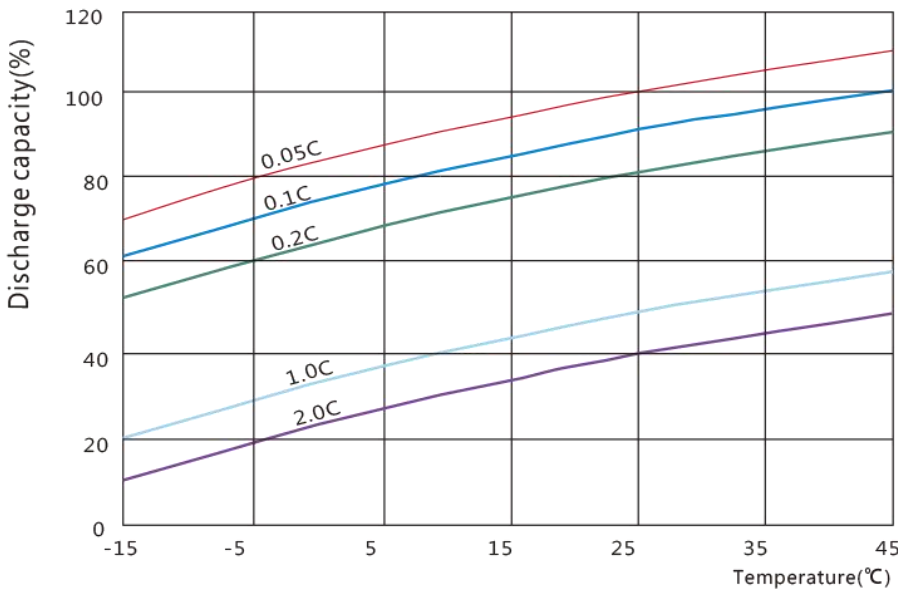

Discharge capacity vs. temperature

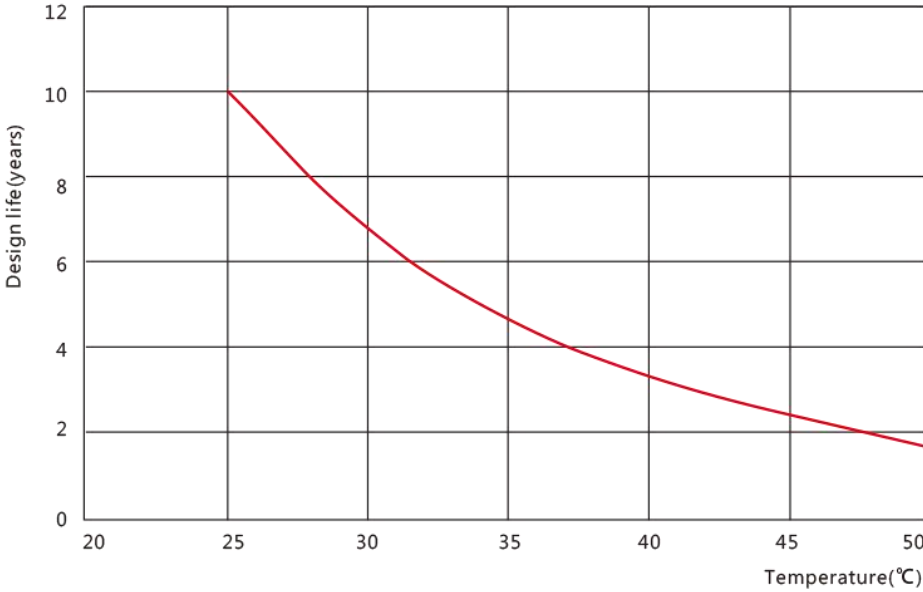

Design life vs. temperature